

AS/NZS 4268:2017

TEST REPORT

For

Pycom Ltd

High Point 9 Sydenham Road, Guildford Surrey GU1 3RX, Surrey, United Kingdom

Tested Model: Fipy 1.0

Report Type: Original Report	Product Type: FiPy
Test Engineer:	Max Min
Report Number:	RSHA180108015-00F
Report Date:	2018-06-23
Reviewed By:	Oscar Ye RF Leader
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA INFORMATION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(a) (1) (i)– 20 dB EMISSION BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29

FCC §15.247(a) (1) (i)-QUANTITY OF HOPPING CHANNEL TEST	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME).....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(b) (2) - PEAK OUTPUT POWER MEASUREMENT.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(d) - BAND EDGES TESTING	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Pycom Ltd
Tested Model	Fipy 1.0
Product Type	FiPy
Dimension	55mm (L)* 20 mm (W)*3.5 mm(H)
Power Supply	DC 3.4-5.5V

**All measurement and test data in this report was gathered from production sample serial number: 20180108015.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-01-08)*

Objective

This test report is prepared on behalf of Pycom Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and DA 00-705 March 30, 2000 and according to Figure 1, it was conform to the requirement of AS/NZS 4268:2017.

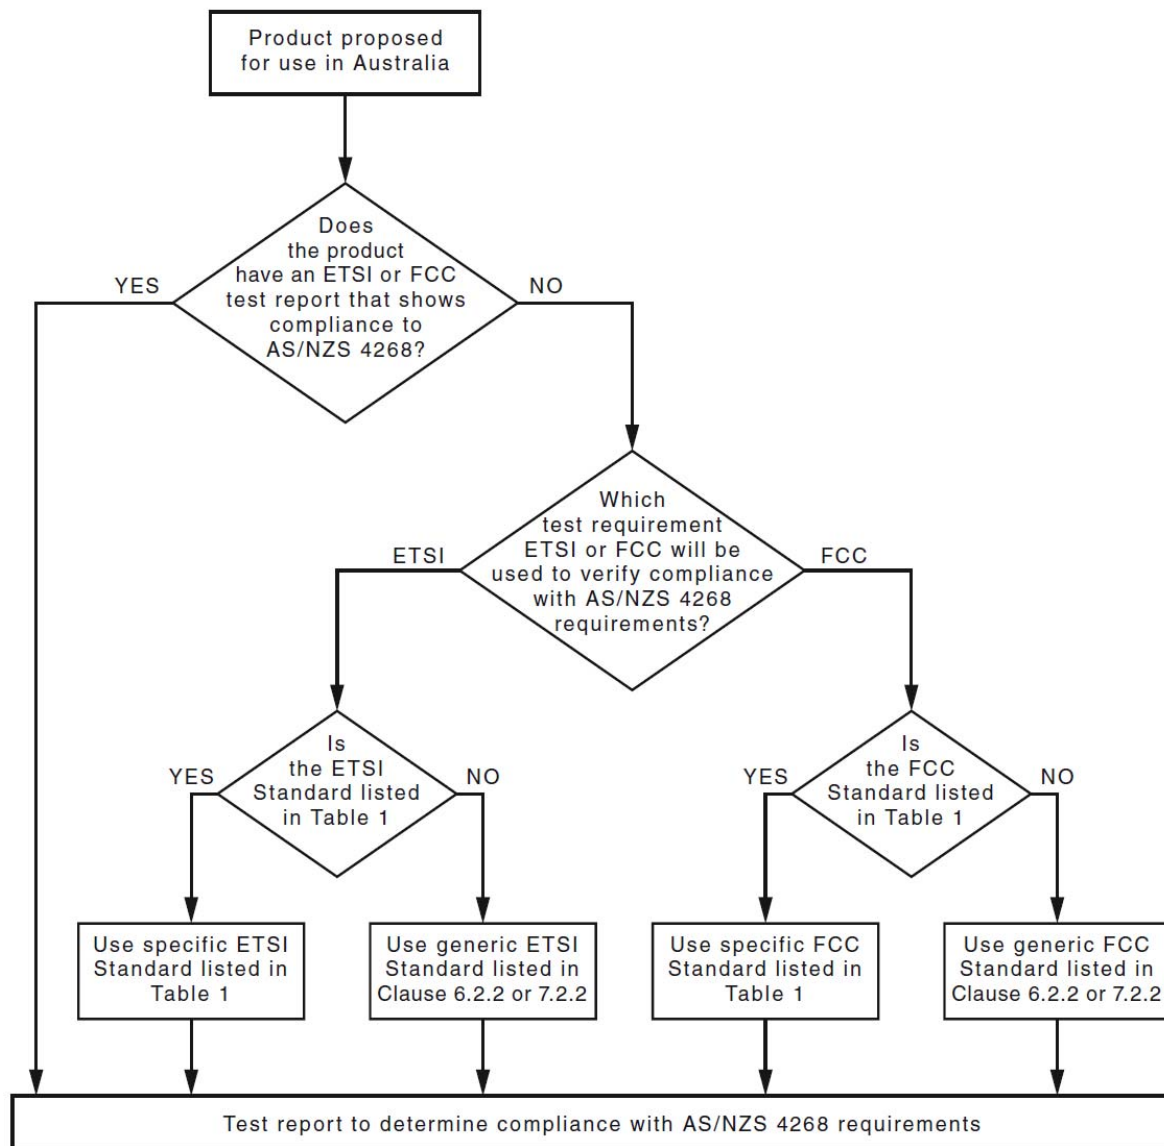


FIGURE 1 DETERMINING METHOD OF ASSESSMENT

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for Sigfox:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	915.025	261	921.525
2	915.050
.....
259	921.475	518	927.950
260	921.500	519	927.975

EUT was tested with Channel 1, 260 and 519.

EUT Exercise Software

RF test tool: putty.

Power level 20

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
Pycom Ltd	Expansion board	V2.1A	1630000932
Pycom Ltd	ANT	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	0.8	Expansion board	Notebook

Block Diagram of Test Setup


For Conducted Emissions:

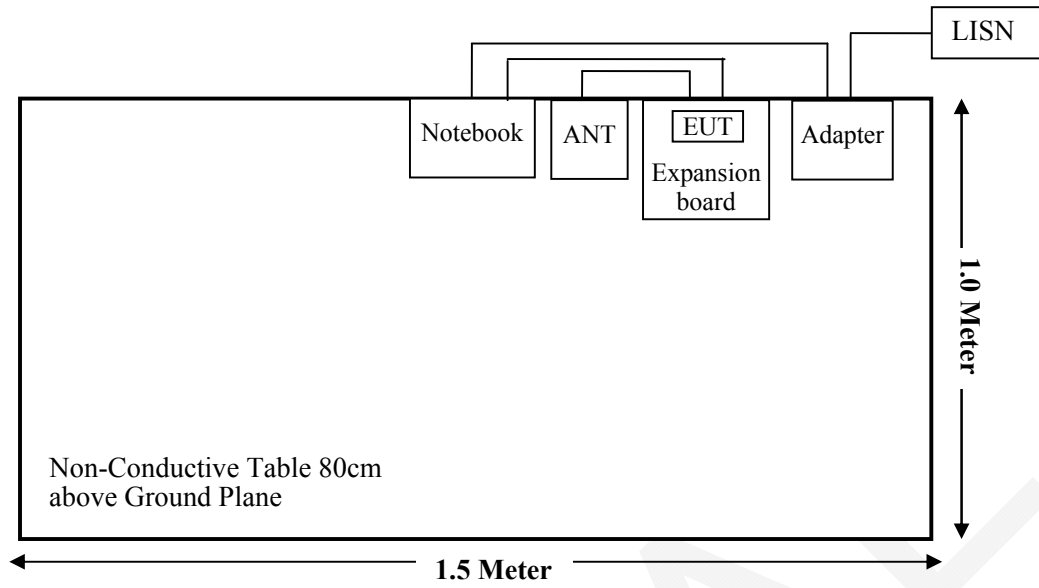

For Radiated Emissions(Below 1GHz):

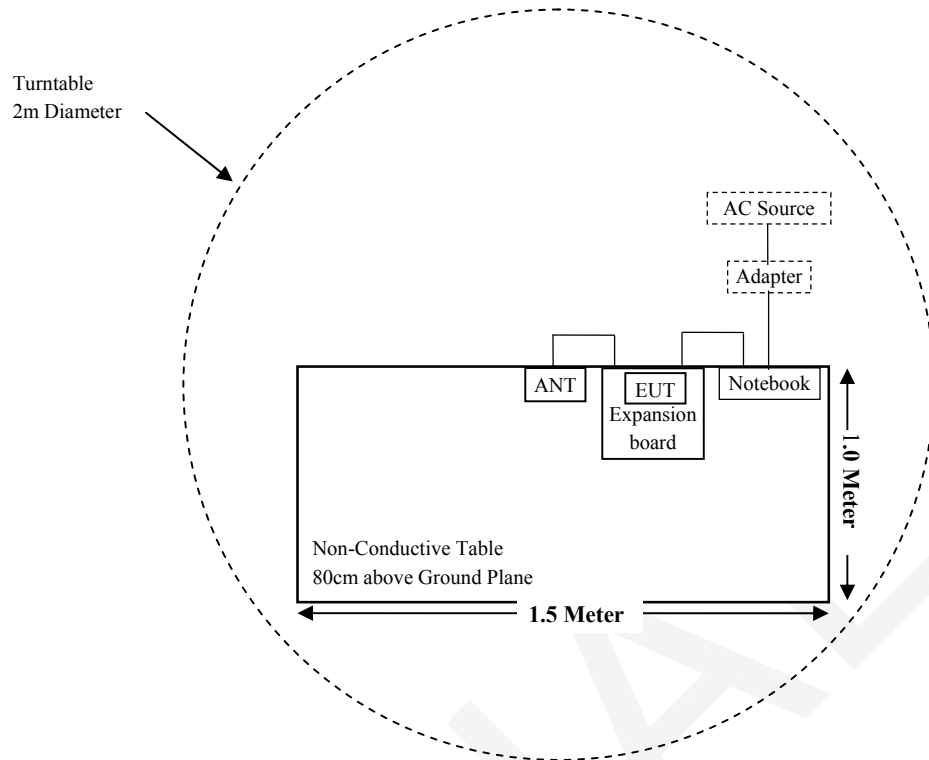

For Radiated Emissions(Above 1GHz):

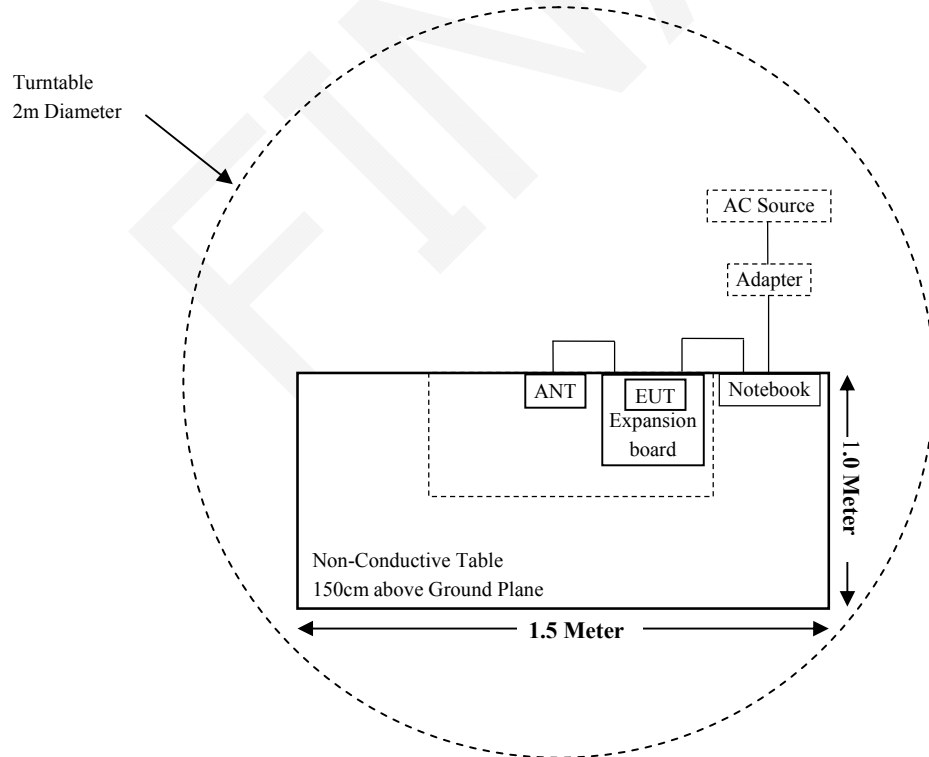

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1) (i)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(i)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(i)	Quantity of hopping channel Test	Compliance
§15.247(b)(2)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
MICRO-TRONICS	Notch Filter	BRC50722	G013	2017-08-05	2018-08-04
Narda	Attenuator/10dB	10dB	/	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2017-07-22	2018-07-21
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-09-21	2018-09-20
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
Pycom Ltd	RF Cable	/	/	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-15	2018-11-14
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Information

The EUT has been tested with an external antenna for Sigfox, which the antenna gain is 0.87 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

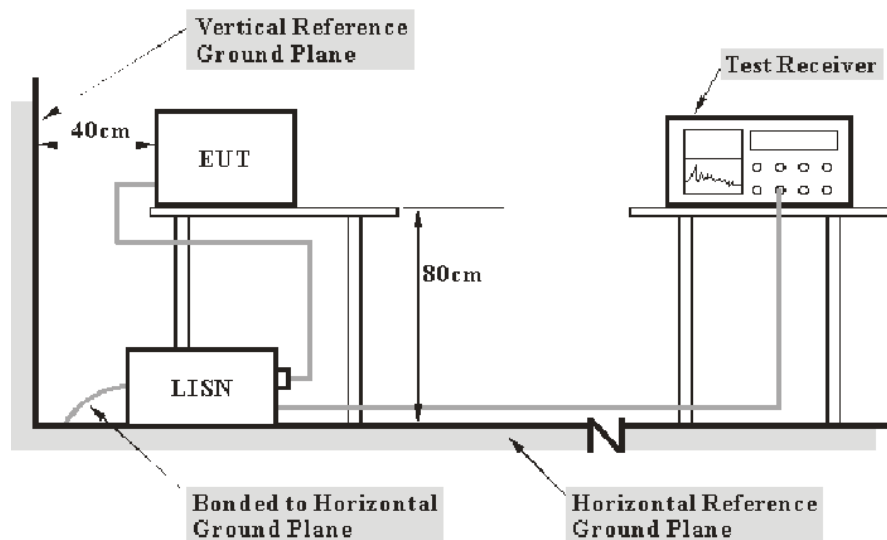

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Max Min on 2018-06-13.


EUT operation mode: Transmitting in low channel (worst case)

AC 120V/60 Hz, Line



Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	45.29	QP	9.000	L1	16.06	66.00	20.71	Compliance
0.150	28.05	AV	9.000	L1	16.06	56.00	27.95	Compliance
0.235	39.49	QP	9.000	L1	16.06	63.57	24.08	Compliance
0.235	27.94	AV	9.000	L1	16.06	53.57	25.63	Compliance
0.400	34.39	QP	9.000	L1	16.09	58.86	24.47	Compliance
0.405	28.33	AV	9.000	L1	16.09	48.71	20.38	Compliance
3.950	33.69	QP	9.000	L1	15.88	56.00	22.31	Compliance
3.950	27.89	AV	9.000	L1	15.88	46.00	18.11	Compliance
7.550	33.01	QP	9.000	L1	15.93	60.00	26.99	Compliance
7.500	27.26	AV	9.000	L1	15.93	50.00	22.74	Compliance
20.700	33.99	QP	9.000	L1	16.17	60.00	26.01	Compliance
20.600	27.15	AV	9.000	L1	16.17	50.00	22.85	Compliance

AC 120V/60 Hz, Neutral

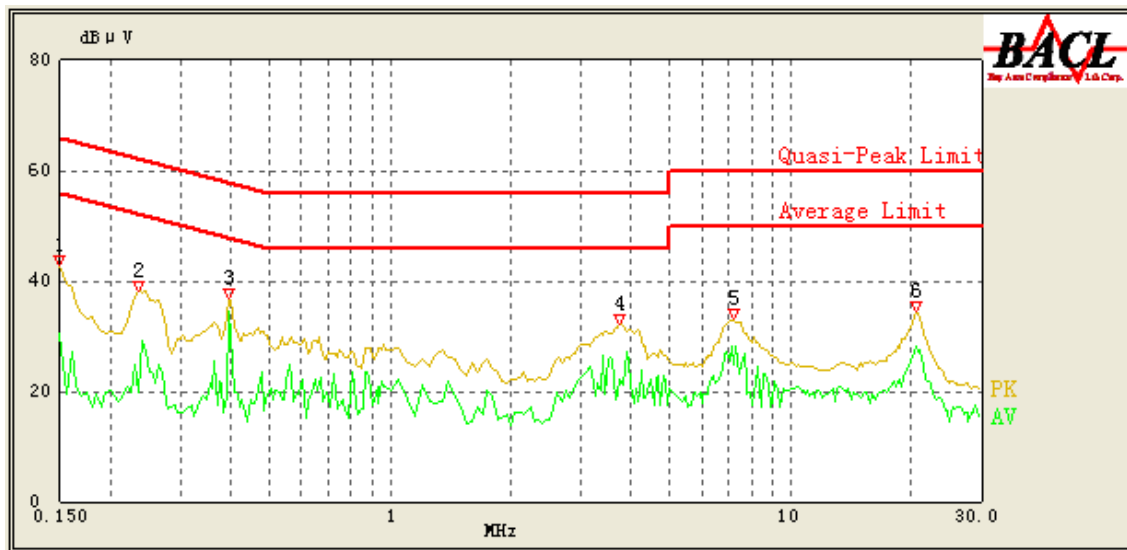



Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	42.87	QP	9.000	N	16.06	66.00	23.13	Compliance
0.150	30.65	AV	9.000	N	16.06	56.00	25.35	Compliance
0.235	38.23	QP	9.000	N	16.06	63.57	25.34	Compliance
0.235	19.71	AV	9.000	N	16.06	53.57	33.86	Compliance
0.395	36.89	QP	9.000	N	16.09	59.00	22.11	Compliance
0.395	34.52	AV	9.000	N	16.09	49.00	14.48	Compliance
3.750	32.19	QP	9.000	N	15.89	56.00	23.81	Compliance
3.750	22.09	AV	9.000	N	15.89	46.00	23.91	Compliance
7.250	33.22	QP	9.000	N	15.93	60.00	26.78	Compliance
7.200	24.68	AV	9.000	N	15.92	50.00	25.32	Compliance
20.550	34.39	QP	9.000	N	16.17	60.00	25.61	Compliance
20.700	28.10	AV	9.000	N	16.17	50.00	21.90	Compliance

Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

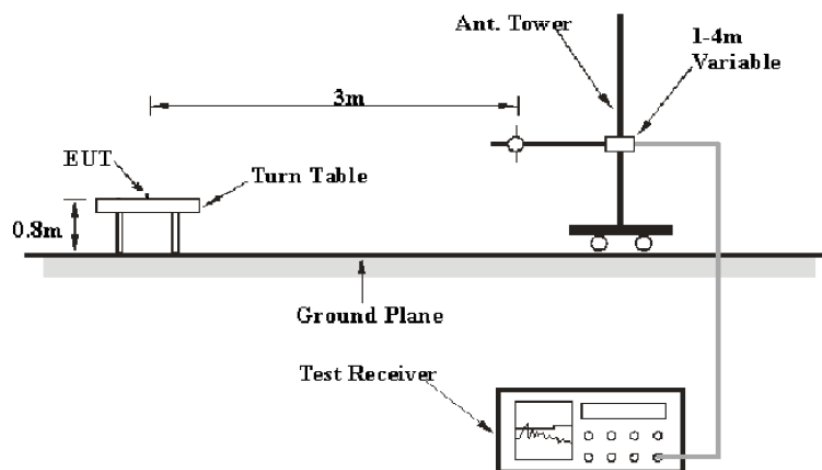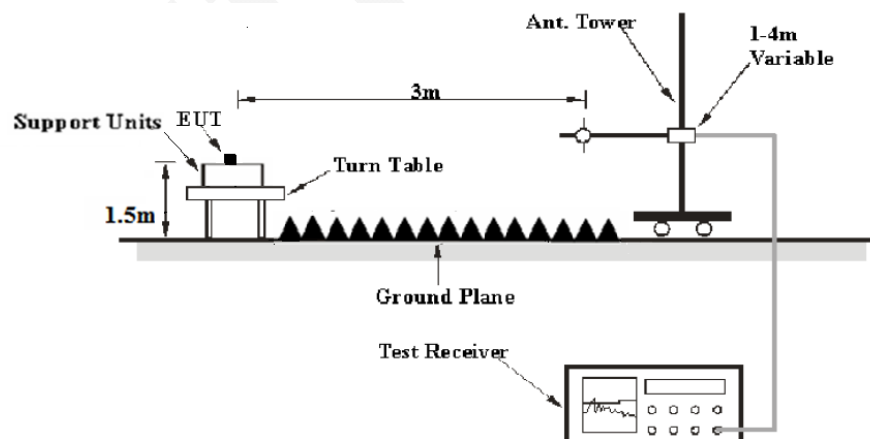EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Max Min on 2018-03-08.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-Scan in the X,Y and Z axes of orientation,, the worst case **low channel in X-axis of orientation** was recorded

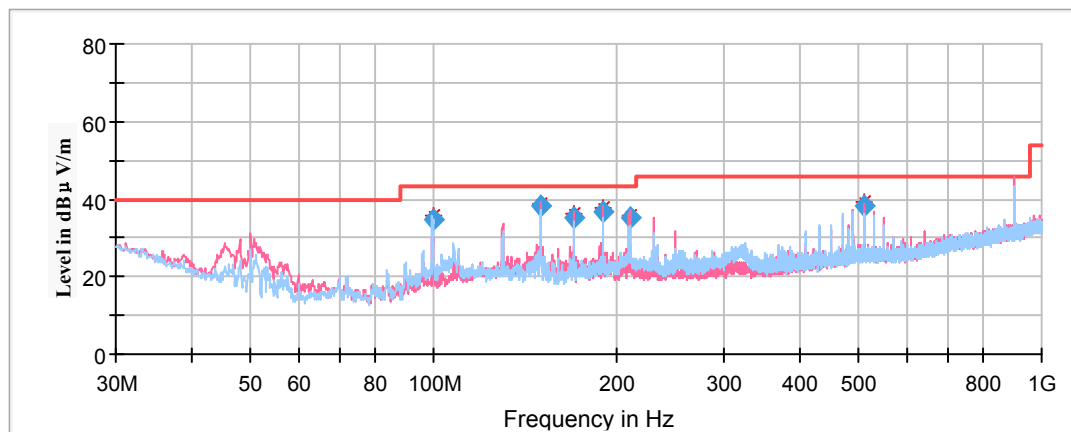

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	Quasi-peak (dBµV/m)	Height (cm)	Polar (H/V)				
99.568950	34.72	198.0	H	358.0	-15.5	43.50	8.78
149.922000	38.13	101.0	V	330.0	-12.8	43.50	5.37
169.964250	35.35	101.0	V	266.0	-13.6	43.50	8.15
189.833350	36.89	101.0	V	153.0	-13.4	43.50	6.61
209.971950	35.14	101.0	V	95.0	-12.7	43.50	8.36
509.921900	38.25	101.0	V	49.0	-6.0	46.00	7.75

1GHz-18GHz:


*Pre-Scan with low, middle and high channel of operation in the X,Y and Z axes of orientation,, the worst case **low channel in X-axis of orientation** was recorded*

Note:

1. This test was performed with the 902-928MHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 915.025 MHz


Full Spectrum

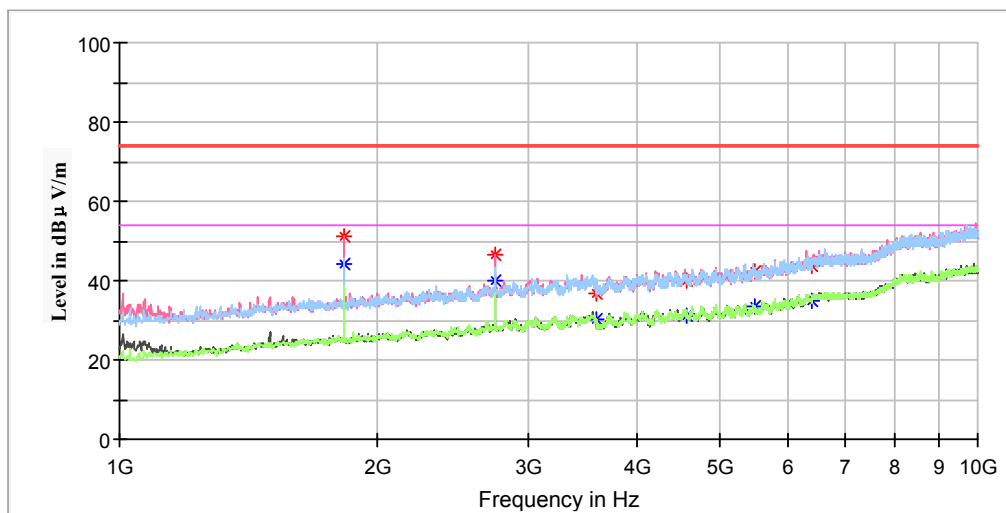

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1829.800000	51.11	---	100.0	V	357.0	-6.7	74.00	22.89
1829.800000	---	44.39	100.0	V	357.0	-6.7	54.00	9.61
2744.200000	46.35	---	200.0	V	188.0	-3.3	74.00	27.65
2744.200000	---	40.06	200.0	V	188.0	-3.3	54.00	13.94
3599.200000	36.95	---	200.0	H	74.0	-0.6	74.00	37.05
3599.200000	---	30.13	200.0	H	74.0	-0.6	54.00	23.87
4574.800000	40.17	---	150.0	V	182.0	2.0	74.00	33.83
4574.800000	---	31.32	150.0	V	182.0	2.0	54.00	22.68
5491.000000	---	33.55	250.0	H	199.0	4.0	54.00	20.45
5491.000000	42.11	---	250.0	H	199.0	4.0	74.00	31.89
6405.400000	---	35.10	150.0	V	234.0	7.8	54.00	18.90
6405.400000	43.51	---	150.0	V	234.0	7.8	74.00	30.49

Middle Channel: 921.500 MHz


Full Spectrum

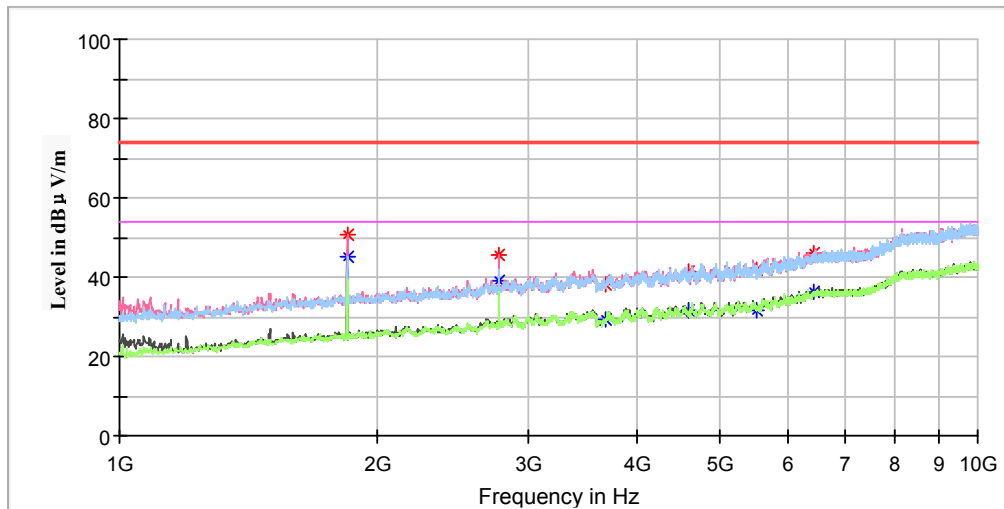

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1842.400000	---	45.19	100.0	V	357.0	-6.6	54.00	8.81
1842.400000	50.49	---	100.0	V	357.0	-6.6	74.00	23.51
2764.000000	---	39.22	200.0	V	218.0	-3.2	54.00	14.78
2764.000000	45.49	---	200.0	V	218.0	-3.2	74.00	28.51
3687.400000	38.36	---	150.0	H	209.0	-0.2	74.00	35.64
3687.400000	---	29.26	150.0	H	209.0	-0.2	54.00	24.74
4605.400000	---	31.44	200.0	V	34.0	2.0	54.00	22.56
4605.400000	41.35	---	200.0	V	34.0	2.0	74.00	32.65
5528.800000	---	31.50	100.0	H	142.0	4.1	54.00	22.50
5528.800000	41.85	---	100.0	H	142.0	4.1	74.00	32.15
6450.400000	---	36.12	200.0	H	117.0	8.0	54.00	17.88
6450.400000	46.22	---	200.0	H	117.0	8.0	74.00	27.78

High Channel: 927.975MHz

Full Spectrum

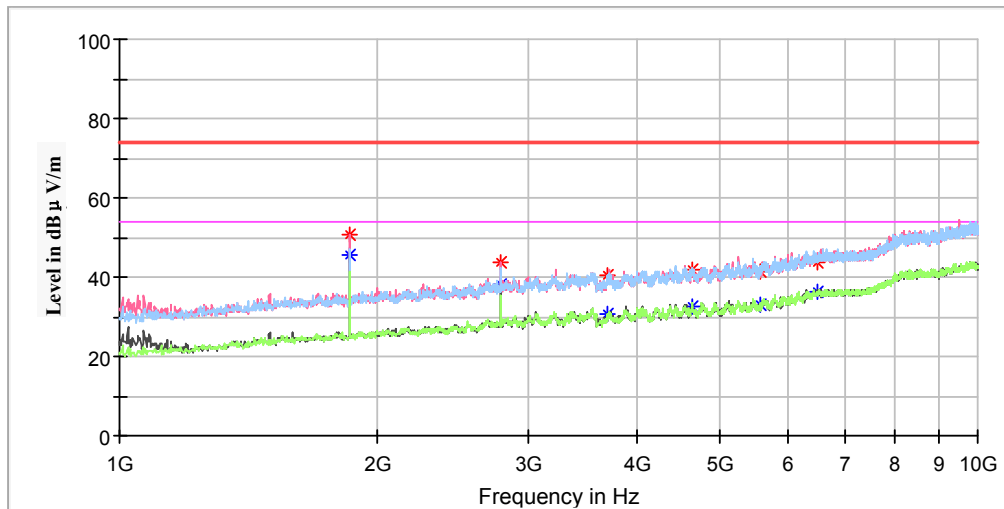

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1855.000000	---	45.48	150.0	V	100.0	-6.6	54.00	8.52
1855.000000	50.73	---	150.0	V	100.0	-6.6	74.00	23.27
2783.800000	---	37.93	100.0	V	205.0	-3.1	54.00	16.07
2783.800000	43.89	---	100.0	V	205.0	-3.1	74.00	30.11
3710.800000	---	30.72	250.0	H	286.0	-0.2	54.00	23.28
3710.800000	40.40	---	250.0	H	286.0	-0.2	74.00	33.60
4639.600000	---	32.39	250.0	H	44.0	2.1	54.00	21.61
4639.600000	41.85	---	250.0	V	44.0	2.1	74.00	32.15
5568.400000	---	32.85	200.0	V	357.0	4.2	54.00	21.15
5568.400000	41.46	---	200.0	V	357.0	4.2	74.00	32.54
6499.000000	43.68	---	150.0	H	166.0	8.3	74.00	30.32
6499.000000	---	36.16	150.0	H	166.0	8.3	54.00	17.84

Fundamental Test & Restricted Bands Emissions:

Pre-Scan in the X,Y and Z axes of orientation,, the worst case X-axis of orientation was recorded

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
915.025MHz								
915.025	115.25	---	100	V	106	1.3	/	/
915.025	113.32	---	100	H	106	1.3	/	/
915.000	36.62	---	100	V	261	1.3	46	9.38
915.000	30.86	---	100	H	261	1.3	46	15.14
921.500MHz								
921.500	115.43	---	100	V	317	1.3	/	/
921.500	113.09	---	100	H	317	1.3	/	/
927.975MHz								
927.975	115.52	---	100	V	193	1.3	/	/
927.975	113.43	---	100	H	193	1.3	/	/
928.000	33.25	---	200	V	252	1.3	46	12.75
928.000	27.86	---	200	H	252	1.3	46	18.14

Spurious Emissions at Antenna Port:


Low Channel

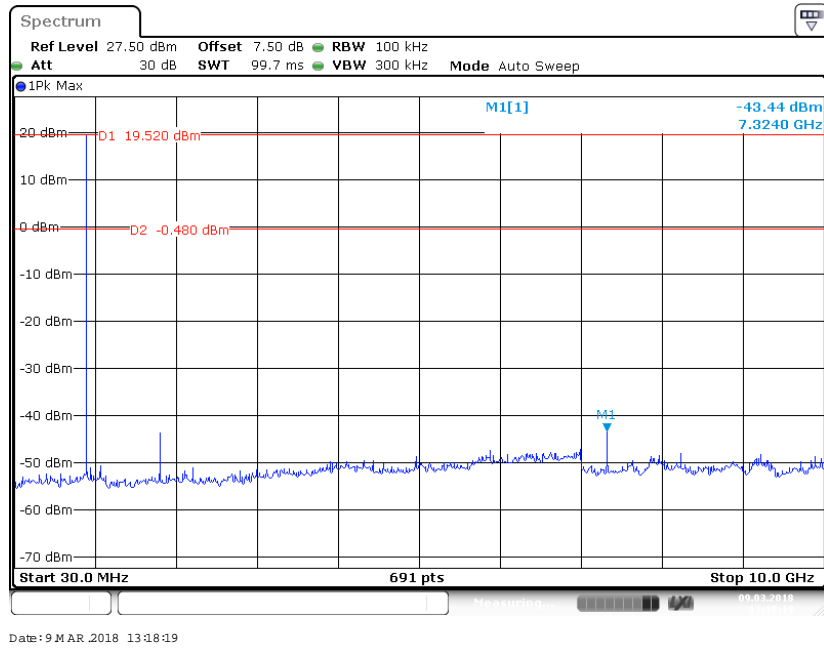

Middle Channel

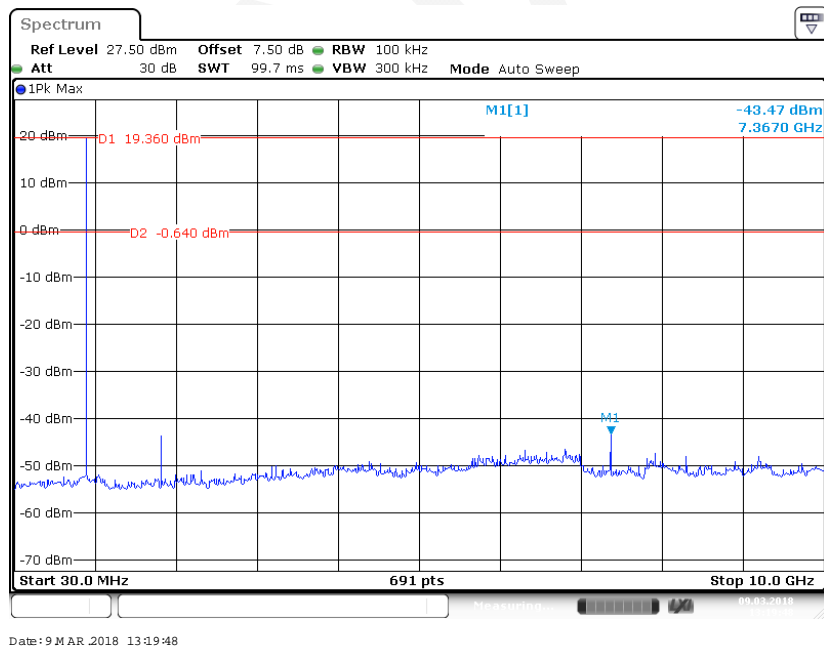

High Channel

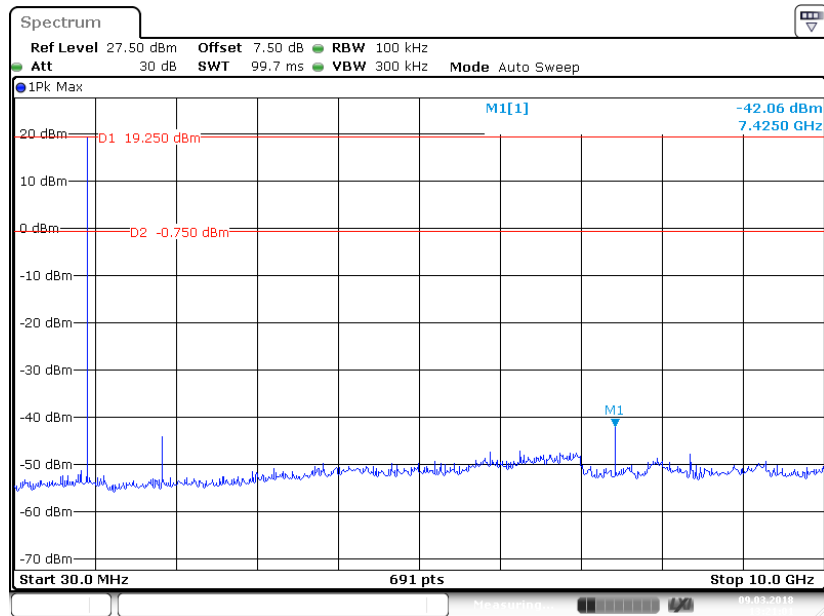

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	24.1 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Max Min on 2018-06-23.

EUT operation mode: Transmitting


Test Result: Compliance.

Channel	Frequency (MHz)	Channel Separation (kHz)	Limit (kHz)	Result
Low	915.025	25.036	≥ 25	Pass
Adjacent	915.050			
Middle	921.500	25.036	≥ 25	Pass
Adjacent	921.525			
High	927.975	25.036	≥ 25	Pass
Adjacent	927.950			


Low Channel

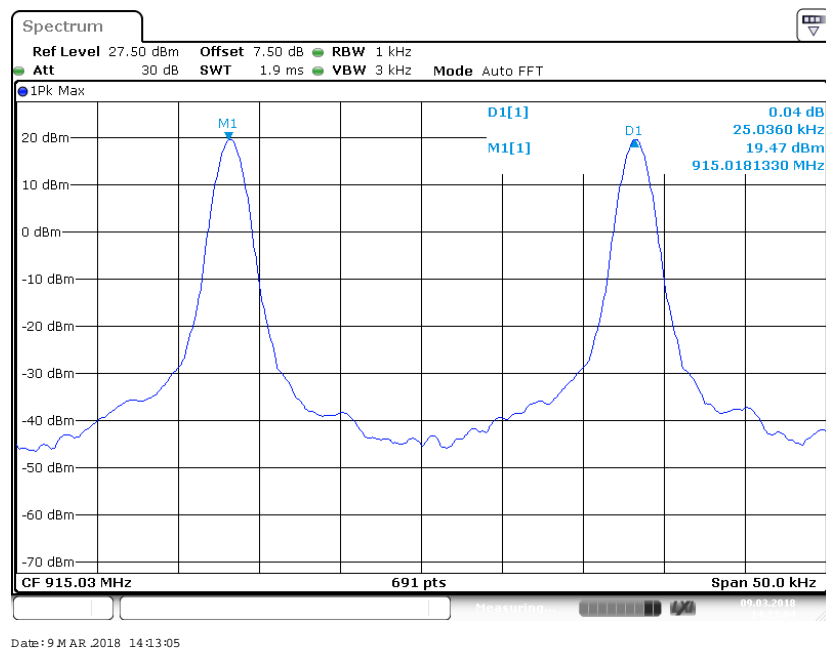

Middle Channel

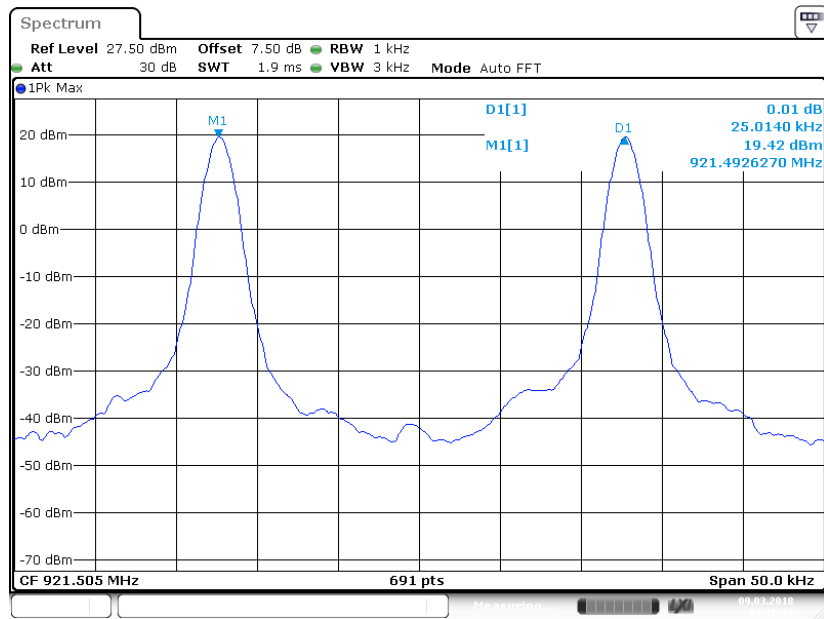

High Channel

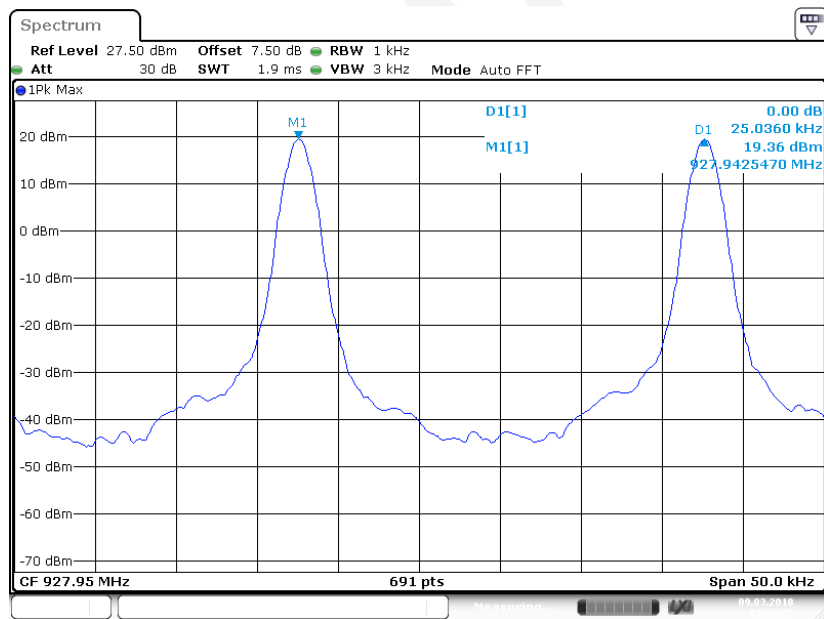

FCC §15.247(a) (1) (i)– 20 dB EMISSION BANDWIDTH**Applicable Standard**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	24.5 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Max Min on 2018-03-08.

EUT operation mode: Transmitting


Test Result: Compliance.

Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)	Limit (kHz)
Low	915.025	2.858	≤500
Middle	921.500	2.858	≤500
High	927.975	2.858	≤500

Low Channel

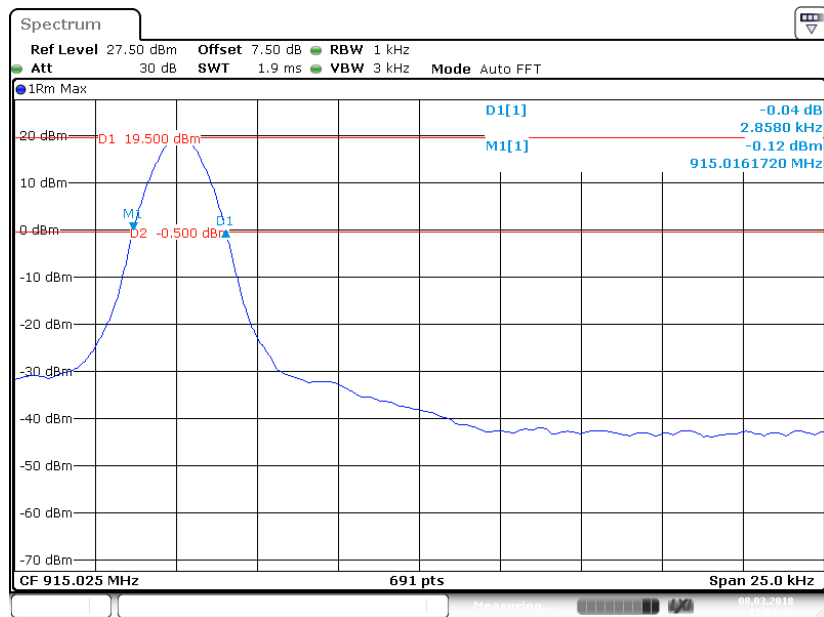


Middle Channel

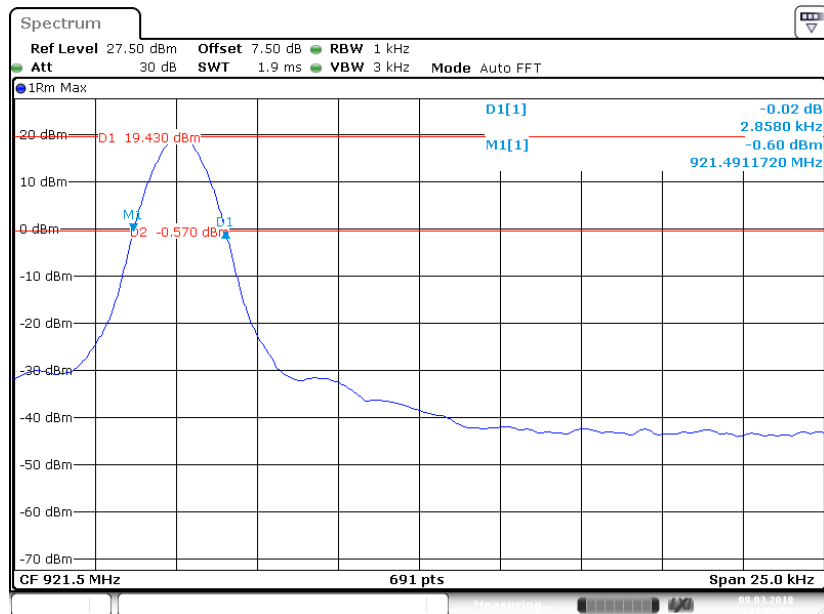

Date: 8 MAR 2018 11:05:57

High Channel

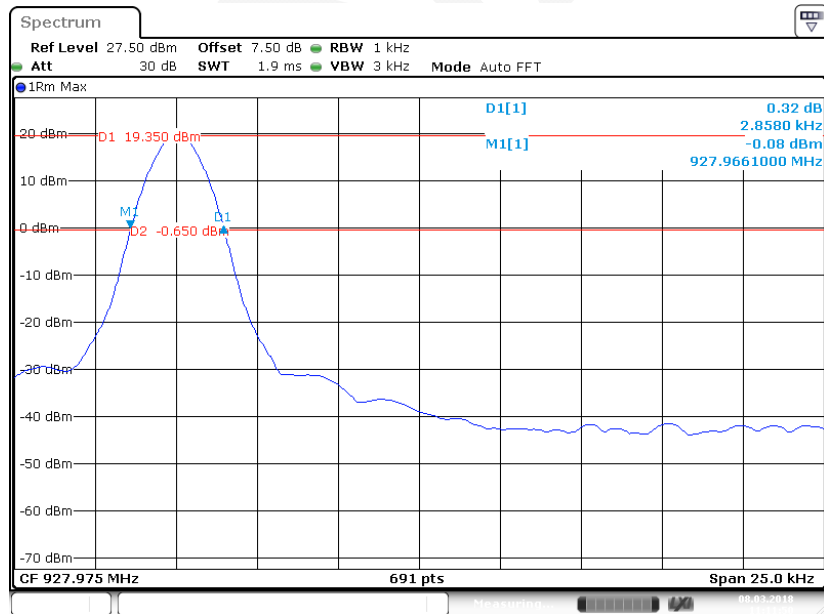

Date: 8 MAR 2018 11:11:50

FCC §15.247(a) (1) (i)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Max Min on 2018-06-23.

EUT operation mode: Transmitting

Test Result: Compliance.


Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
915~928	519	≥50

Number of Hopping Channels

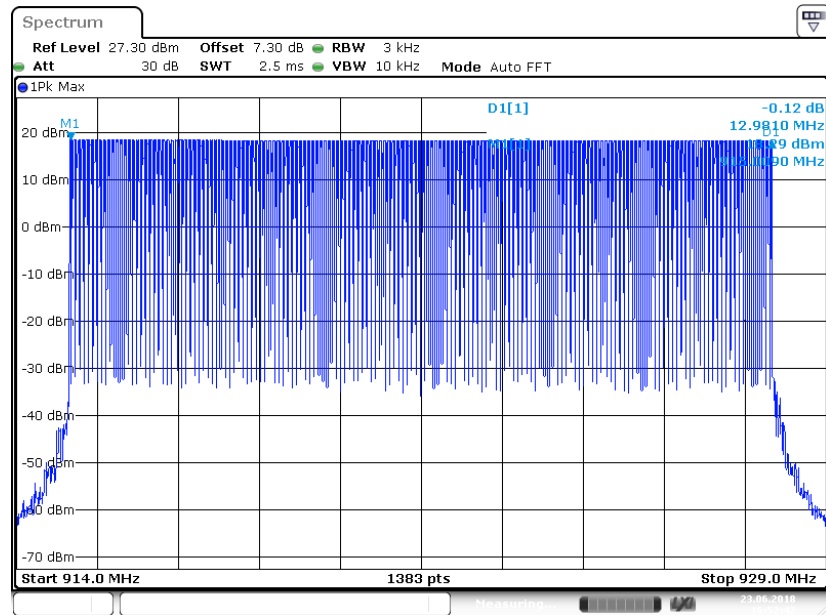

Date: 23 JUN 2018 16:52:42

Number of Hopping Channels

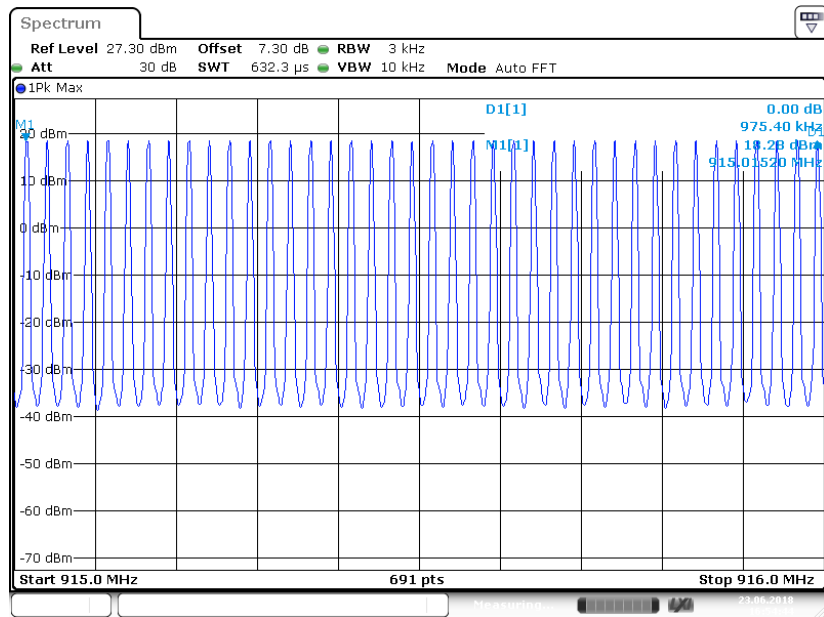

FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data**Environmental Conditions**

Temperature:	24.2 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Max Min on 2018-06-23.

EUT operation mode: Transmitting

Test Result: Compliance.


Channel	Pulse Width	Pulse Number	Dwell Time	Limit	Result
	(ms)		(s)	(s)	
Low	231.9	1	0.2319	≤0.4	Pass
Middle	231.9	1	0.2319	≤0.4	Pass
High	231.9	1	0.2319	≤0.4	Pass
Note: Dwell time = Pulse time * N					

Low Channel

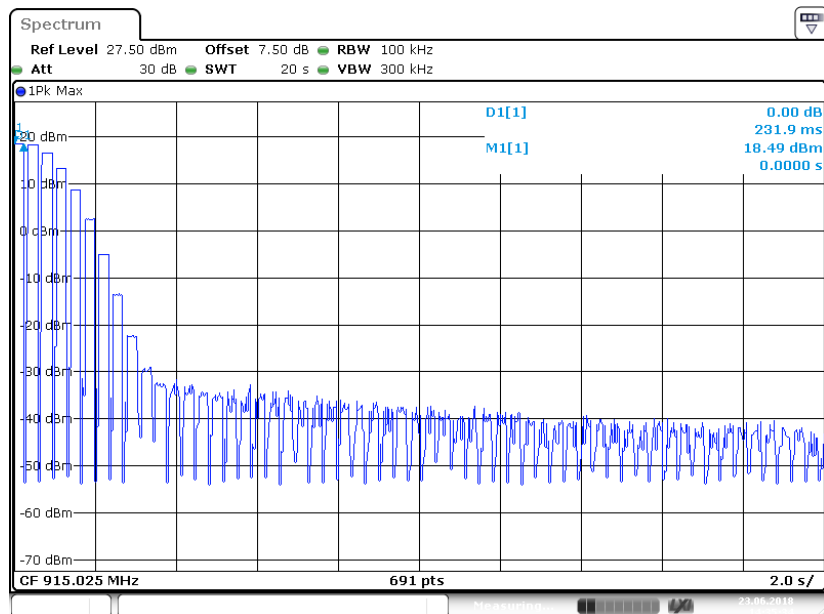


Date: 23 JUN 2018 14:35:34

Middle Channel

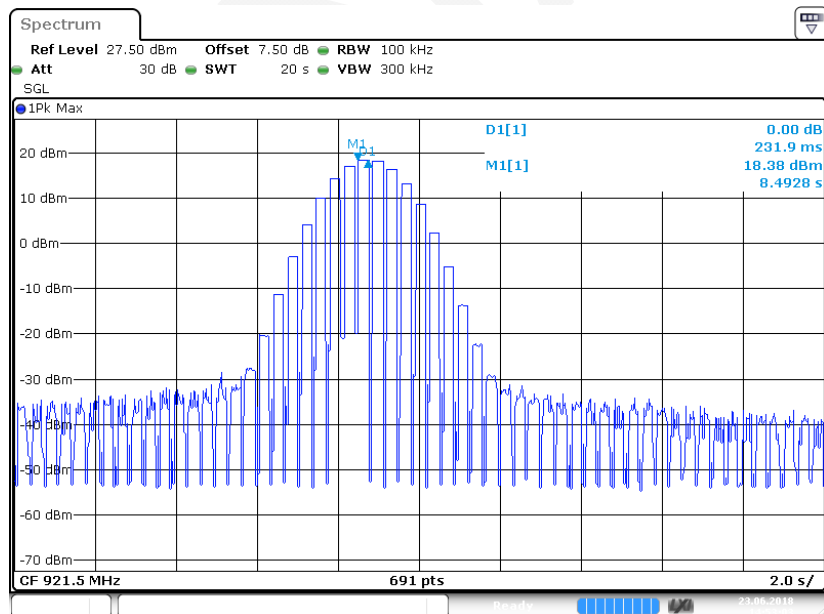

Date: 23 JUN 2018 14:53:04

High Channel

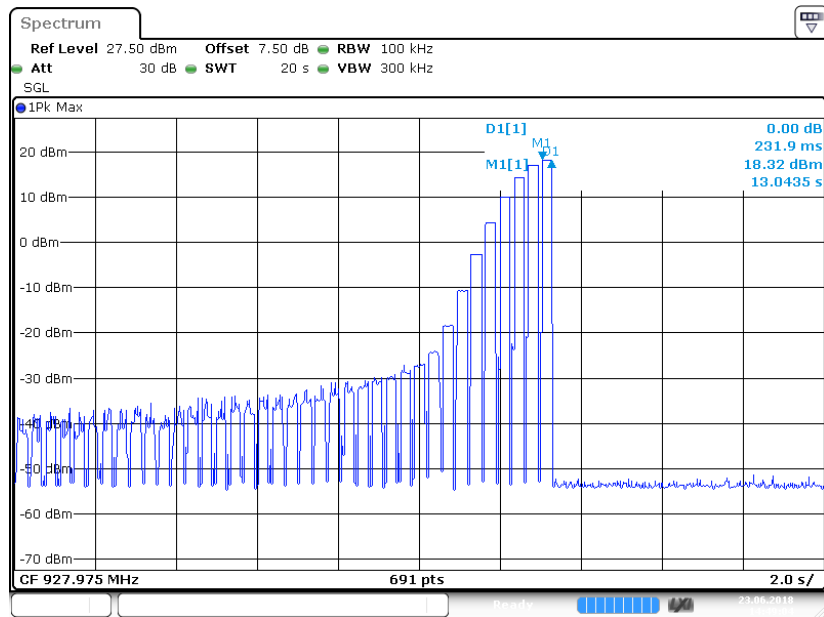

FCC §15.247(b) (2) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (2), For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Max Min on 2018-03-08.

EUT operation mode: Transmitting

Test Result: Compliance.


Channel	Frequency (MHz)	Peak Conducted Output Power		Limit (mW)
		(dBm)	(mW)	
Low	915.025	19.49	88.92	≤1000
Middle	915.450	19.44	87.90	≤1000
High	926.675	19.35	86.10	≤1000

Low Channel Power

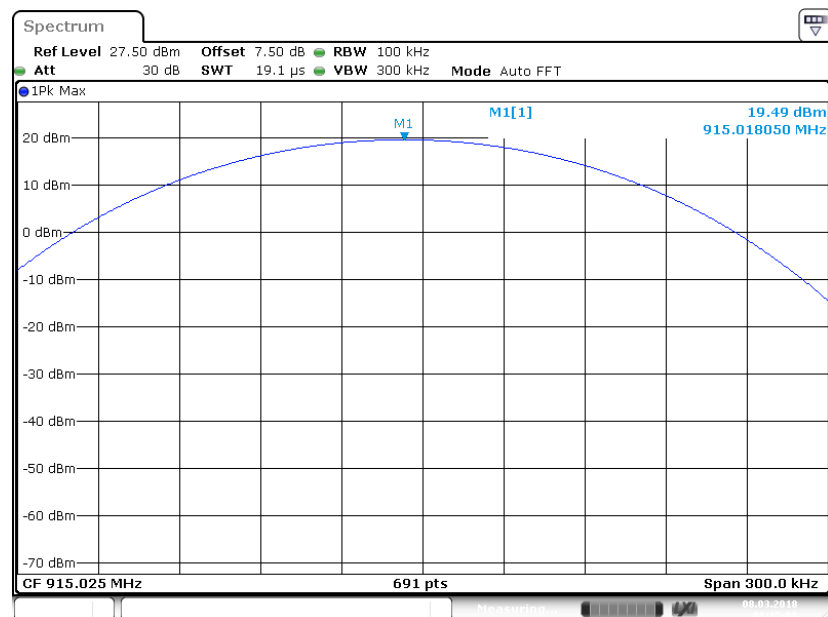


Date: 8 MAR 2018 08:15:09

Middle Channel Power

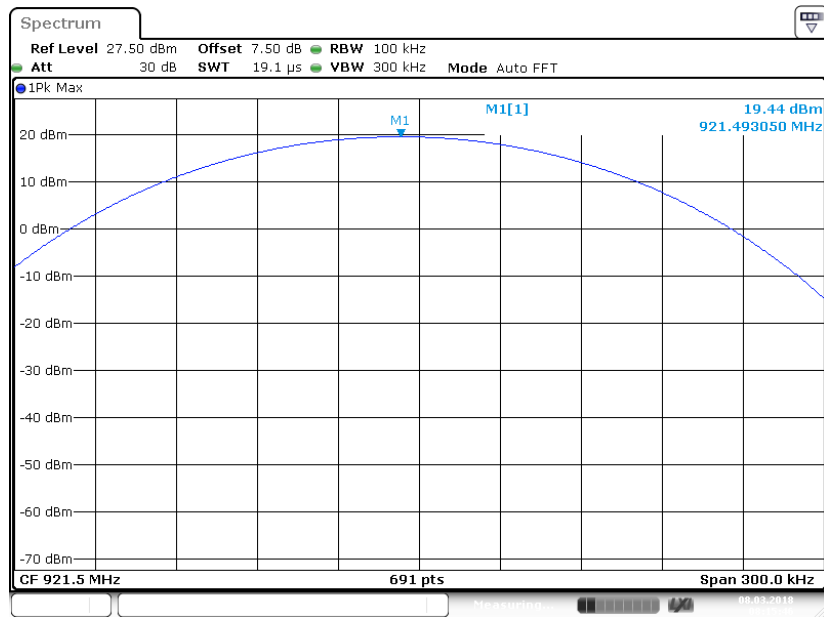

High Channel Power

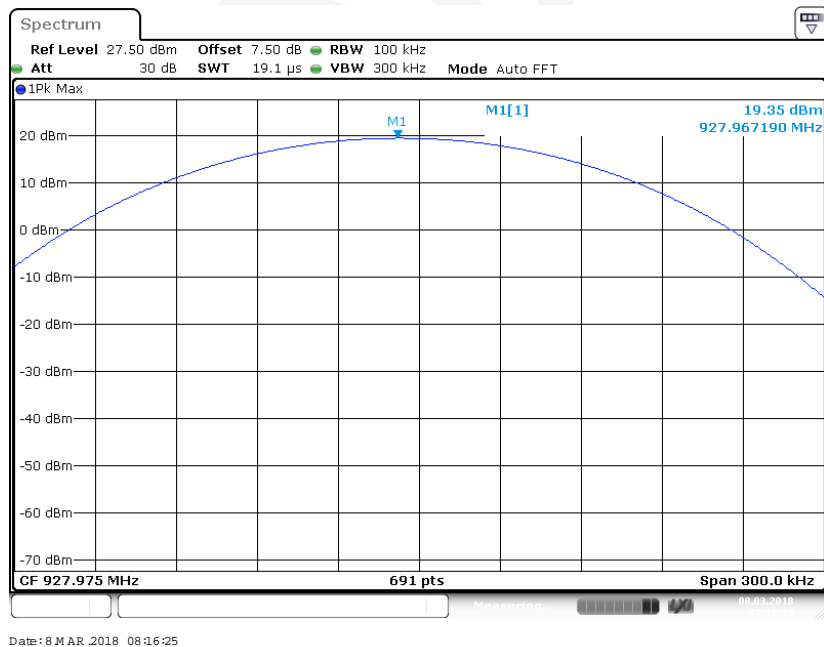

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Max Min on 2018-03-08.


EUT operation mode: Transmitting

Test Result: Compliance.


Band Edge-Left Side

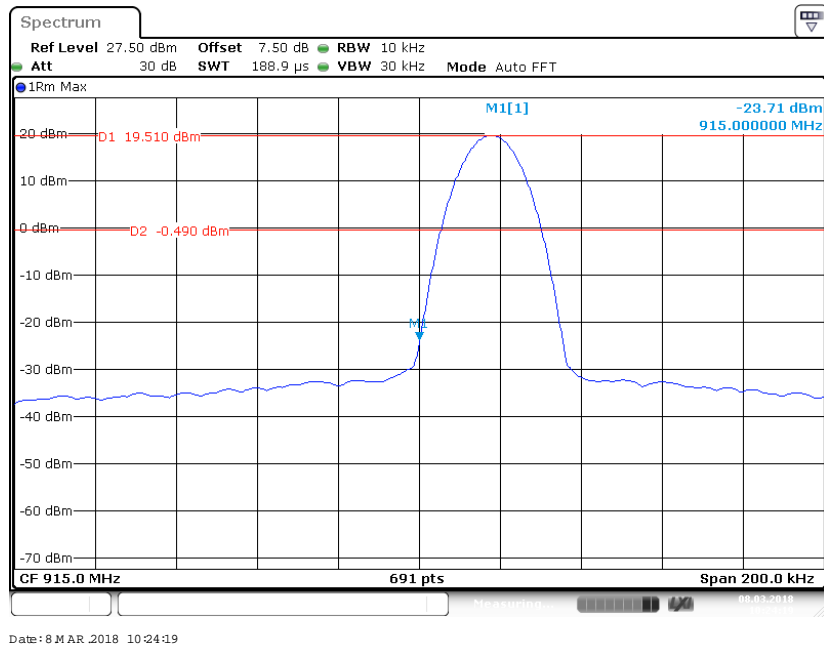

Band Edge-Right Side

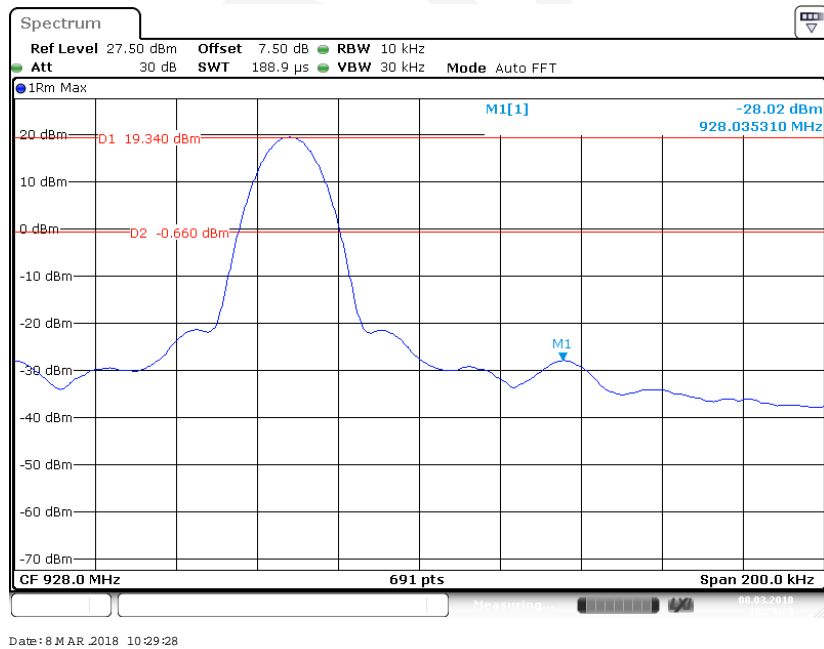


Band Edge-Left Side (Hopping)

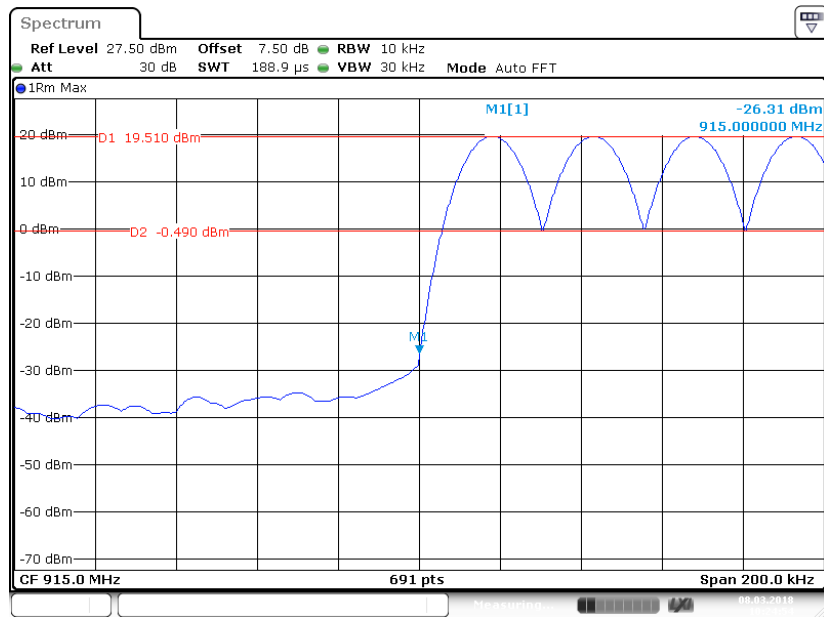

Date: 8 MAR 2018 10:24:54

Band Edge-Right Side (Hopping)

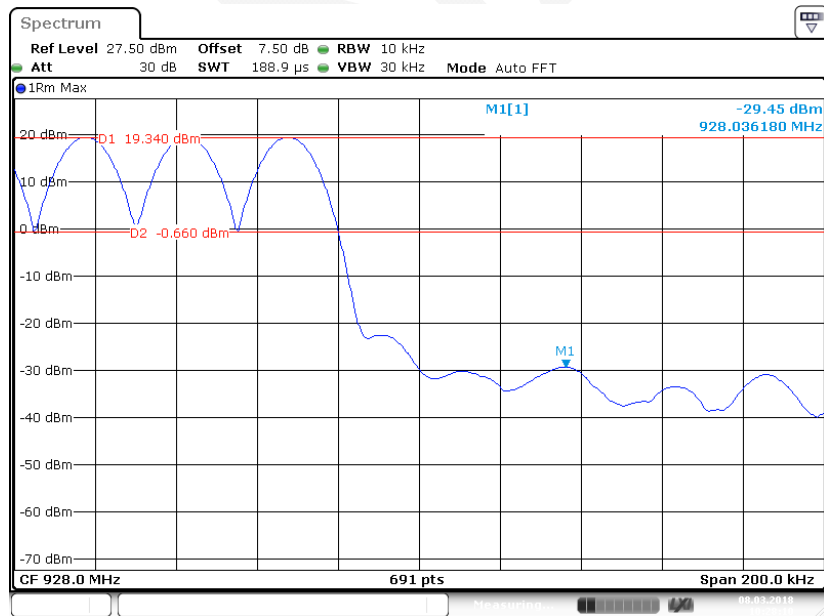

Date: 8 MAR 2018 10:28:10

***** END OF REPORT *****